


Plastic Wheel Spacers

Reduce unsprung weight by up to 80%! Structural composite spacers have been tested and can withstand high heat and high side forces in asphalt use. Must be torqued for proper break-in. Sold each.

| Part No. | Description | Thickness | I.D. | O.D. |
|----------|------------------|-----------|--------|--------|
| ALL44202 | 5x5 And 5x4-3/4" | 1/4" | 3.475" | 7" |
| ALL44204 | 5x5 And 5x4-3/4" | 1/2" | 3.475" | 7" |
| ALL44206 | Wide 5 | 1/4" | 7.750" | 11.75" |
| ALL44208 | Wide 5 | 1/2" | 7.750" | 11.75" |

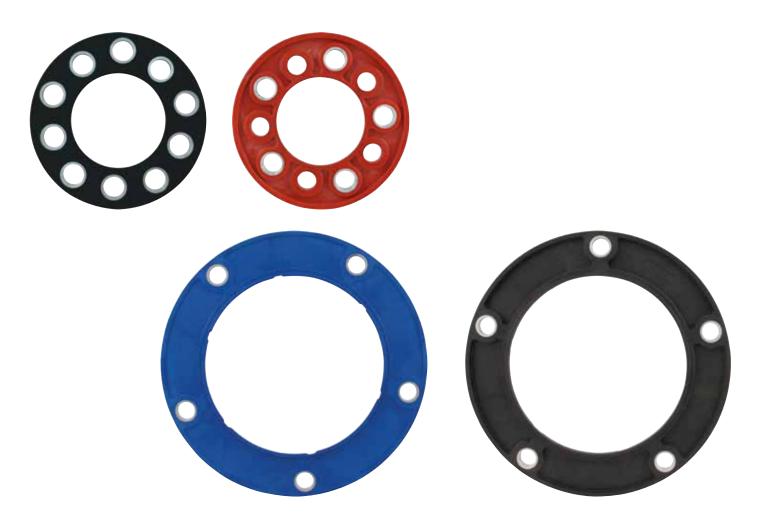

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098 Phone: (269) 463-8000 Fax: (800) 772-2618 www.allstarperformance.com