

# INSTALLATION INSTRUCTIONS 25/8" ELECTRIC CLOCK MODEL 3585, 4485, 5885


WEAR SAFETY GLASSES

2650-706C

# Mounting

### FRONT MOUNTING (SIDE VIEW)

This clock can be mounted in a 25%" dia. hole or in an optional under-dash panel or mounting cup. Fasten with brackets supplied as shown. (Hookup wire is required.)

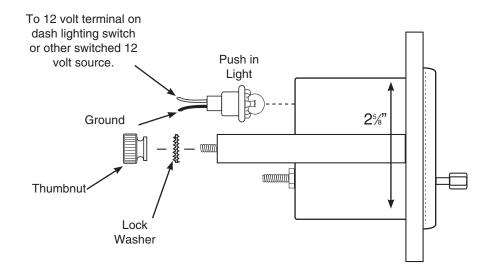

## Installation


- 1. Disconnect negative (-) battery cable.
- Mount clock into dash or panel using mounting bracket and hardware provided.
- 3. Attach 20 gauge wire to the negative (-) terminal on back of clock and the opposite end to a good engine ground.
- Attach second wire to the positive (+) terminal on back of clock and the opposite end to an in-line fuse that has a constant 12 volt power source.
- 5. Reconnect negative (-) battery cable.

**NOTE:** To set clock, push in the set knob and turn clockwise to the current time.

**IMPORTANT:** When time is set, make sure that the knob is in the out position for proper operation.

NOTE: Clock should be fused with a Littlefuse® 312.187 type. 312.187 is a %A cartridge type fuse that can be used with an in-line fuse holder.

# CAUTION! As a safety precaution the Red wire of this product should be fused before connecting it to the positive (+) side of the 12V DC battery. We recommend using a 4 Amp, 3AG fast-acting type cartridge fuse (Littlefuse<sup>®</sup> # 312 004 or an equivalent) inline with the Red wire of our product.

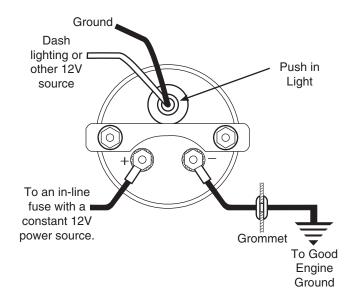

#### SERVICE

For service send your product to Auto Meter in a well packed shipping carton. Please include a note explaining what the problem is along with your phone number. Please specify when you need the product back. If you need it back immediately mark the outside of the box "RUSH REPAIR," and Auto Meter will service product within two days after receiving it. (\$10.00 charge will be added to the cost of "RUSH REPAIR.") If you are sending product back for Warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.

#### 12 MONTH LIMITED WARRANTY

Auto Meter Products, Inc. warrants to the consumer that all Auto Meter High Performance products will be free from defects in material and workmanship for a period of twelve (12) months from date of the original purchase. Products that fail within this 12 month warranty period will be repaired or replaced at Auto Meter's option to the consumer, when it is determined by Auto Meter Products, Inc. that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the Auto Meter instruments. In no event shall this warranty exceed the original purchase price of the Auto Meter instruments nor shall Auto Meter Products, inc. be responsible for special, incidental or consequential damages or costs incurred due to the failure of this product. Warranty claims to Auto Meter must be transportation prepaid and accompanied with dated proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. All implied warranties shall be limited in duration to the said 12 month warranty period. Breaking the instrument seal, improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. Auto Meter Products, Inc. disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by Auto Meter.